

Additel 160 Intelligent Digital Pressure Modules

- Pressure measurement accuracy of 0.025% FS
- Pressure ranges to 10,000 psi (700 bar)
- Fully temperature compensated accuracy



Gauge pressure Differential pressure

OVERVIEW

With advanced microprocessor technology and state-of-the-art silicon pressure sensors, the Additel 160 series Intelligent Digital Pressure Module (IDPM) provides an accurate, reliable, and economic solution for wide range of pressure applications. It is loaded with functionality and remarkably easy to use. In order to reach the best performance, every silicon pressure sensor in the module has been specially aged, tested and screened before assembly. Designed as external pressure module for Additel 761 automated pressure calibrator and Additel 222A, Additel 223A and Additel 761 calibrators, the Additel 160 IDPM is unmatched in performance and reliability.

FEATURES

- Gauge pressure measurement accuracy of 0.025% FS
Absolute Pressure measurement accuracy of 0.1% FS
- Pressure ranges to 10,000 psi (700 bar)
- Advanced temperature compensation
- NIST traceable calibration and data included

SPECIFICATIONS

- **Gauge types**
Gauge pressure
Compound pressure
Absolute pressure
- **Pressure Ranges and Accuracy**

Compound Pressure					
P/N	Pressure Range (psi)	Pressure Range (bar)	Media	Accuracy(%FS)	Burst Pressure
CP2	±2	±0.16	G	0.05	3X
CP5	±5	±0.35	G	0.025	3X
CP10	±10	±0.7	G	0.025	3X
CP15	±15	±1	G	0.025	3X
CP30	-15 to 30	-1 to 2	G	0.025	3X
CP100	-15 to 100	-1 to 7	G, L	0.025	3X
CP300	-15 to 300	-1 to 20	G, L	0.025	3X

Gauge Pressure ^[1]					
P/N	Pressure Range (psi)	Pressure Range (bar)	Media ^[2]	Accuracy(%FS)	Burst Pressure
V15	-15	-1.0	G	0.025	3X
GP2	2	0.16	G	0.05	3X
GP5	5	0.35	G	0.025	3X
GP10	10	0.7	G	0.025	3X
GP15	15	1.0	G	0.025	3X
GP30	30	2.0	G	0.025	3X
GP50	50	3.5	G, L	0.025	3X
GP100	100	7.0	G, L	0.025	3X
GP300	300	20	G, L	0.025	3X
GP500	500	35	G, L	0.025	3X
GP600	600	40	G, L	0.025	3X
GP1K	1,000	70	G, L	0.025	3X
GP2K	2,000	140	G, L	0.025	3X
GP3K	3,000	200	G, L	0.025	3X
GP5K	5,000	350	G, L	0.025	3X
GP10K	10,000	700	G, L	0.025	2X

Note:

[1]. Sealed gauge pressure for above 1000 psi

[2]. G=Gas, L=Liquid

SPECIFICATIONS

Absolute Pressure					
P/N	Pressure Range (psi)	Pressure Range (bar)	Media	Accuracy (%FS)	Burst Pressure
AP5	5	0.35	G	0.1	3X
AP10	10	0.7	G	0.1	3X
AP15	15	1.0	G	0.1	3X
AP30	30	2.0	G	0.1	3X
AP50	50	3.5	G	0.1	3X
AP100	100	7.0	G , L	0.1	3X
AP300	300	20	G , L	0.1	3X
AP500	500	35	G , L	0.1	3X
AP1K	1,000	70	G , L	0.1	3X
AP3K	3,000	200	G , L	0.1	3X
AP5K	5,000	350	G , L	0.1	3X

Differential Pressure					
P/N	Pressure Range (inH ₂ O)	Pressure Range (mbar)	Media	Accuracy(%FS)	Burst Pressure
DP1	±1	±2.5	G	0.05	100X
DP2	±2	±5.0	G	0.05	100X
DP5	±5	±10	G	0.05	50X
DP10	±10	±25	G	0.05	20X
DP20	±20	±50	G	0.05	20X
DP30	±30	±75	G	0.05	20X
DP50	±50	±160	G	0.05	3X
DP150	±150	±350	G	0.025	3X
DP300	±300	±700	G	0.025	3X


- Environmental**
 Compensated Temperature: 14°F to 12°F(-10°C to 50°C)
 Operating Temperature*: 14F to 122F(-10C to 50C)
*0.025%FS accuracy guaranteed only over the ambient temperature range of 68°F to 79°F (20°C to 26°C)
 Storage Temperature: -4°F to 158°F (-20°C to 70°C)
 Humidity: <95%
- Pressure Connections**
 1/4NPT male, 1/4BSP male, M20X1.5 male
 Other Connections available per request
- Enclosure**
 Case material: SST
 Wetted parts: 316L SS
 Dimension: Ø1.3" x 4.84" (Ø33mm x 123mm)
 Weight: 0.99 lb (0.4kg)
- Warranty: 1 Year**



Additel 160 Application

ORDERING INFORMATION

Model Number

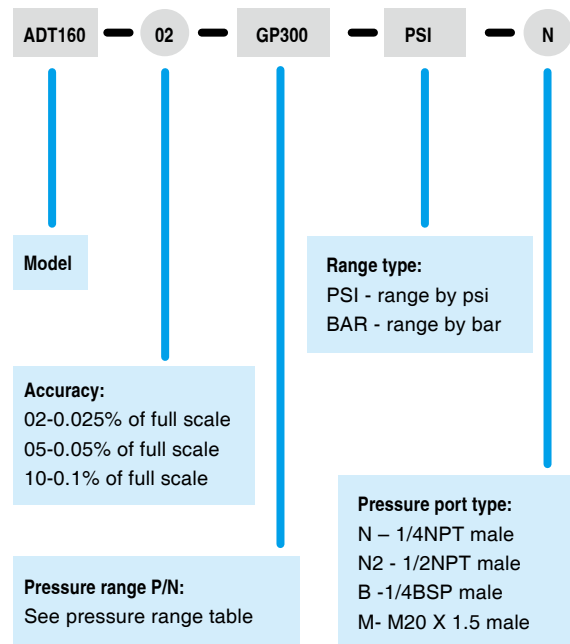

- Accessories included**
 NIST Traceable Calibration Certificate

Optional Accessories

Model number	Description	Picture
9060	Pressure module connection cable	