



### QSE MAG FLOWMETER

The QSE Mag Series is a dependable highly accurate electromagnetic flowmeter designed for flow and usage monitoring in commercial applications.

The Noryl™ housing and flow tube offer a lightweight, easy-to-install Mag Meter that is resistant to heat (210°F [99°C]) and compatible with many water-based liquid solutions.

The QSE Mag Meter monitors flow rate and total flow in a wide variety of applications including: HVAC, Turf/ Irrigation and other water reclamation applications.

### FEATURES / BENEFITS

- Low investment and operating costs
- ± 0.5% Accuracy of Reading (from 0.25 fps to 15 fps [0.08 to 4.6 m/s])
- Wide turndown ratio of 60:1
- Non-intrusive, no moving parts to wear out, maintenance, repair costs low and tolerates high flows without damage
- The slightly modified bore permits unobstructed flow and minimizes flow disturbances and straight pipe requirements
- 7 line sizes (½" to 4") ½", ¾", 1", 1-½", 2", 3", & 4"
- Housing ported with "Thermal Well Supports" for sensors (Energy Management)
- Compatible with GPI 09 Electronics Display or FLOMEC QSI I/O Board

### PRODUCT IDENTIFIER 1

**QSE** = Electro-Magnetic Flow Meter

### SIZE 2

**05** = 1/2"  
**07** = 3/4"  
**10** = 1"  
**15** = 1-1/2"  
**20** = 2"  
**30** = 3" (Flange only)  
**40** = 4" (Flange only)

### FITTING 3

**NPT** = NPT (Male) (½" to 2" Only)  
**BSP** = BSP (Male) (Rc Thread) (½" to 2" Only)  
**FAP** = ANSI Flange - Polymer (3" & 4" Only)  
**FAS** = ANSI Flange - Steel (3" & 4" Only)  
**FDS** = DIN Flange - Steel (3" & 4" Only)

### ELECTRONIC CHOICE 4

**09** = **Computer w/Integral Display & Meter Mounted Transmitter (Pulse Out)** 2-Button Computer, Field-configurable (2 Totals, 2 Cals, Rate), Coverplate Transmitter w/Pulse Out (Open Collector Square Wave)

**QB** = **Meter Mounted Transmitter (Pulse Out)** Coverplate Transmitter, w/Pulse Out (Open Collector Square Wave)

### COMMUNICATION CHOICE 5

**Q1** = **Integrates with Any Electronic Choice** QSI Module: Blue Tooth®, Coil/Digital Pulse Input, Pulse Output (Flow or Energy & Scalable), RS485 (MODbus RTU), Temperature Inputs, BTU Calculator. Energy Use Computation *Note: Energy Use Computation Requires Temperature Sensor Probes (Select Probes Below)*

**Q2** = **Integrates with Any Electronic Choice** QSI Module: Blue Tooth®, Coil/Digital Pulse Input, Pulse Output (Flow or Energy & Scalable), Data Logger, Temperature Inputs, BTU (Heat) Calculator. Energy Use Computation *Note: Energy Use Computation Requires Temperature Sensor Probes (Select Probes Below)*

**Q3** = **Integrates with Any Electronic Choice** QSI Module: Blue Tooth®, Coil/Digital Pulse Input, Pulse Output (Scalable), Data Logger, 4-20mA.

**XX** = No Communication Suite

### TEMPERATURE SENSOR PROBES 6

**1** = **Integrates with QSI Communications Choice for Energy Use Computation** (2ea) 1" (25 mm) Long Temperature Sensor Probes w/Cables (10 ft. [3 m]) (Customer Installed), Used with 1/2" through 2" Meters

**2** = **Integrates with QSI Communications Choice for Energy Use Computation** (2ea) 2" (50 mm) Long Temperature Sensor Probes w/Cables (10 ft. [3 m]) (Customer Installed), Used with 3" and 4" Meters

**X** = No Temperature Probes

### PACKAGING (Auto Select) 7

**A** = 1/2" - 2" Meters  
**B** = 3" Meter  
**C** = 4" Meter

>>>> **1** **2** **3** **4** **5** **6** **7**  
**QSE 30 FAP 09 Q1 2 B**

# SPECIFICATIONS

<b>Fitting Type:</b>	NPT, BSP, ANSI Flanged, DIN Flanged
	1/2" to 2" - NPT (Male), BSPP (Male) (ISO 228)
	3" & 4" 150# ANSI Flanged - Polymer Flange
	3" & 4" ANSI Flanged - Steel Flange
	3" & 4" DIN Flanged - Steel Flange
<b>Recommended Plastic Flange Bolt Torque:</b>	25 ft.-lbs. (33.9 N·m)
<b>Pipe Sizes:</b>	1/2", 3/4", 1", 1-1/2", 2", 3", 4"
<b>Pressure Rating:</b>	150 psi @ 73° F (10 bar @ 23° C)
<b>Accuracy</b>	
±0.5% of Reading between 0.25 fps and 15 fps (0.08 m/s and 4.6 m/s) (Reference Owner's Manual for complete accuracy and uncertainty specifications)	
<b>Operating Temperature Range:</b>	1/2"-2": 32° F to 210° F (0° C to 99° C) 3"-4": 32° F to 180° F (0° C to 82° C)

<b>Ambient Temperature Range:</b>	0° F to 140° F (-18° C to 60° C)	
<b>Typical K-Factor:</b>	1/2" (05)	4347 PPG (1158.5 Pulses/L)
	3/4" (07)	1937 PPG (511.8 Pulses/L)
	1" (10)	1089 PPG (287.7 Pulses/L)
	1-1/2" (15)	484.1 PPG (127.9 Pulses/L)
	2" (20)	400 PPG (105.7 Pulses/L)
	3" (30)	121 PPG (32.0 Pulses/L)
	4" (40)	68.1 PPG (18.0 Pulses/L)
<b>Power Supply:</b>	Externally Powered	
	Voltage Supply (Min): 12V (dc or ac)	
	Voltage Supply (Max): 30V (dc or ac)	
<b>Consumption:</b>	Max current consumption (QSE with QSB): 75mA	
	Max current consumption (QSE with QSI): 150mA	
<b>Wetted Materials:</b>	Body	Noryl™
	Electrodes	316L SS
	Seals	NBR O-Rings
<b>Frequency Range:</b>	All Sizes	10 Hz Minimum - 1,000 Hz Maximum (with 09 Display)
		10 Hz Minimum - 3,000 Hz Maximum (with Blind Pulse Out)
<b>Calibration Report:</b>	Standard	
	N.I.S.T. Available	


# APPLICATIONS

- Agriculture Irrigation
- Turf Irrigation Systems
- Micro Irrigation Systems
- HVAC
- EMS (Energy Management Systems)
- BAS (Building Automation Systems)
- Chilled water
- Domestic water (hot and cold)
- Energy sub-metering (BTU hot and cold)
- Process (blow down, make up, boiler feed, etc.)

# APPROVALS

NEMA 6P

IP68

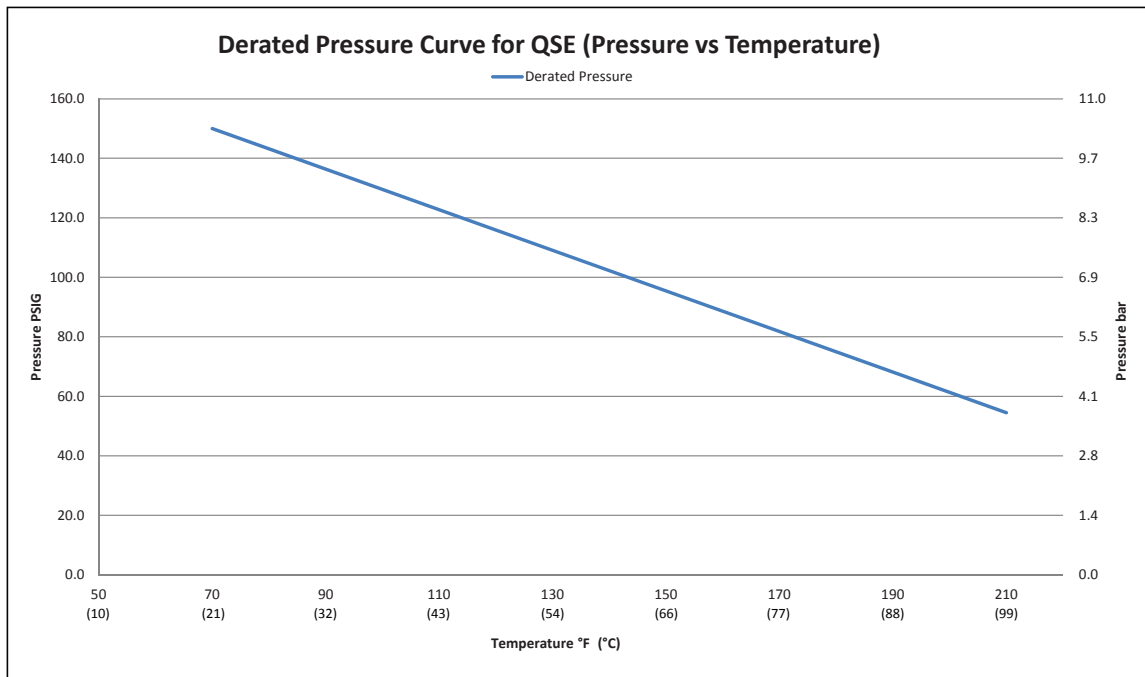

**Service & Warranty:** For technical assistance, warranty replacement or repair contact your **FLOMEC®** or **GPI®** distributor: In North or South America: **888-996-3837 / FLOMEC.net**  
Outside North or South America: **+61 2 9540 4433 / FLOMEC.net**

Wichita · Sydney · Mexico City

