

## 01A Series Specifications

	U.S.	Canada	International
<b>Model</b>	01A31GM	01A31LM	01A12LM
<b>Unit of Measurement</b>	Gallon	Litre	Litre
<b>Flowrate</b>	3 to 30 GPM	10 to 100 LPM	10 to 100 LPM
<b>Working Pressure</b>	300 PSI	20.7 bar	20.7 bar
<b>Operating Temperature</b>	+14° F to +130° F	-10° C to +54° C	-10° C to +54° C
<b>Storage Temperature</b>	-40° F to +158° F	-40° C to +70° C	-40° C to +70° C
<b>Threads</b>	1-inch NPT 3/4 in. fittings included	1-inch NPT 3/4 in. fittings included	1-inch ISO No fittings included

## LIMITED WARRANTY POLICY

Great Plains Industries, Inc. 5252 E. 36th Street North, Wichita, KS USA 67220-3205, hereby provides a limited warranty against defects in material and workmanship on all products manufactured by Great Plains Industries, Inc. This product includes a 2-year warranty. Manufacturer's sole obligation under the foregoing warranties will be limited to either, at Manufacturer's option, replacing or repairing defective Goods (subject to limitations hereinafter provided) or refunding the purchase price for such Goods theretofore paid by the Buyer, and Buyer's exclusive remedy for breach of any such warranties will be enforcement of such obligations of Manufacturer. The warranty shall extend to the purchaser of this product and to any person to whom such product is transferred during the warranty period.

The warranty period shall begin on the date of manufacture or from the date of purchase with an original sales receipt. This warranty shall not apply if:

- the product has been altered or modified outside the warrantor's duly appointed representative;
- the product has been subjected to neglect, misuse, abuse or damage or has been installed or operated other than in accordance with the manufacturer's operating instructions.

To make a claim against this warranty, contact the GPI

Customer Service Department at 316-686-7361 or 800-835-0113. Or by mail at: Great Plains Industries, Inc., 5252 E. 36th St. North, Wichita, KS, USA 67220-3205

The company shall, notify the customer to either send the product, transportation prepaid, to the company at its office in Wichita, Kansas, or to a duly authorized service center. The company shall perform all obligations imposed on it by the terms of this warranty within 60 days of receipt of the defective product.

GREAT PLAINS INDUSTRIES, INC., EXCLUDES LIABILITY UNDER THIS WARRANTY FOR DIRECT, INDIRECT, INCIDENTAL AND CONSEQUENTIAL DAMAGES INCURRED IN THE USE OR LOSS OF USE OF THE PRODUCT WARRANTED HEREUNDER.

The company herewith expressly disclaims any warranty of merchantability or fitness for any particular purpose other than for which it was designed.

This warranty gives you specific rights and you may also have other rights which vary from U.S. state to U.S. state.

Note: In compliance with MAGNUSON MOSS CONSUMER WARRANTY ACT - Part 702 (governs the resale availability of the warranty terms).

**GREAT PLAINS INDUSTRIES, INC.**  
"A Great Plains Ventures Subsidiary"  
1-800-835-0113 www.gpi.net

5252 East 36th Street North  
Wichita, KS USA 67220-3205  
TEL: 316-686-7361  
FAX: 316-686-6746



© Great Plains Industries, Inc. Printed in the U.S.A. 02/05 Rev A 920689-06

- 1-inch inlet and outlet. 3/4-inch fittings included with most NPT thread models.
- Manual and automatic ON. Automatic OFF.
- LCD display with floating decimal point for easy viewing at the nozzle.
- Cumulative and batch totals.
- NOTE: Batteries are disconnected for shipment.
- Field-replaceable AAA alkaline batteries.
- Flowrate of 3 to 30 GPM or 10 to 100 LPM for pump or gravity flow systems.
- Factory calibrated for gasoline, diesel fuel or kerosene. Ready to install and use.


**Accurate, Convenient,  
Reliable and Economical**

**Buy Smart. Buy Value. Buy GPI.**



## 01A Series Electronic Digital Meter

for petroleum fuels only

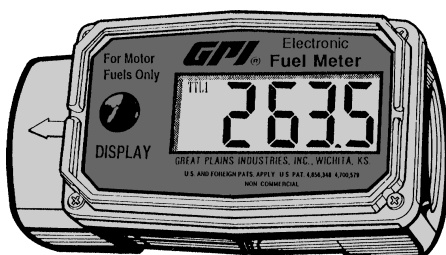

See Inside For  
Owner's Manual.

Batteries included. Connect before use.

# 01A Series Electronic Digital Meter

## owner's manual

### Important Notice

The 01A Series meter is for use with gasoline, diesel fuel and kerosene only. Do not use to meter water or chemicals. Do not use for measuring fuel or other liquids into aircraft.

This meter is not legal for trade application.

The 01A Series meter is very sensitive to electric signals if operated within one to two inches of some electric motors.

### Battery Connection

1. Remove the four Phillips-head screws and lift the faceplate from the meter.
2. Remove tape from the end of one battery.
3. Place the battery back and make sure the positive post is in the correct position.
4. Make sure the O-ring is fully seated and secure the faceplate with the four screws. The O-ring may need to be stretched to seat properly.

### Calibration

This meter has a permanent factory calibration for measuring gasoline, diesel fuel or kerosene. If installed and used correctly, inaccuracies of no greater than +5% will be obtained.

### Installation

Install the meter at the end of the fuel hose adjacent to the nozzle. This meter may also be installed in-line either horizontally or vertically. Install as follows:

1. Remove nozzle from hose.
2. Wrap all connections with 3 to 4 wraps of Teflon® tape. Ensure the tape does not intrude into the flow path.
3. Attach meter to hose with arrow on outlet port pointed in the direction of flow.
4. Attach nozzle to meter. If necessary, use the enclosed 3/4-inch fitting.
5. With a wrench, tighten the meter at the housing ends.

### Operation

#### Batch and Cumulative Totals

The 01A Series meter maintains two totals. Press the DISPLAY button briefly to switch between them. The batch total may be reset to measure flow during a single use. The cumulative total provides continuous measurement and may not be manually reset. When the cumulative total reaches a maximum reading of 9999, it will automatically reset to zero.

The batch total will display as TTL1 and the cumulative total as TTL2.

#### Activate the Meter

Turn the 01A Series meter ON by starting fuel flow or briefly pressing the DISPLAY button. The meter will display the batch or cumulative total from last use.

The meter is programmed to conserve power by automatically turning OFF if not used for one minute.

*(Operation continued top next column.)*

#### Reset Batch Total

Press DISPLAY briefly to display the batch total. Hold the DISPLAY button for three seconds to reset the batch total to zero.

### Maintenance

Proper handling and care will extend the life and service of the meter.

#### Turbine Rotor

The 01A Series meter is virtually maintenance-free. However, it is important that the rotor moves freely. Keep the meter clean and free of contaminants.

If the rotor does not turn freely, apply a penetrating lubricant on the rotor, shaft and bearings. Remove any debris or deposits from the rotor using a soft brush or small probe. Be careful not to damage the turbine rotor or supports.



**CAUTION**  
Blowing compressed air through the turbine assembly could damage the rotor.

#### Battery Replacement

The 01A Series meter is powered by two AAA alkaline batteries, which may be replaced while the meter is installed. When batteries are removed or lose power, the batch and cumulative totals reset to zero but the factory calibration is retained.

If the meter display becomes dim or blank, replace the batteries as follows:

1. Remove the four Phillips-head screws from the face of the meter and lift the faceplate from the turbine.
2. Remove the old batteries and clean any corrosion from the terminals.
3. Install new batteries, ensuring the positive posts are in the correct position.
4. When the batteries are replaced, the faceplate will power ON. Check the display to ensure normal functions have resumed before reassembling.
5. Reseat batteries, if necessary, and position the faceplate on the turbine housing. To avoid moisture damage, make sure the O-ring is fully seated. The O-ring may need to be stretched to seat properly. Tighten the four screws on the faceplate.

### Repair

For warranty consideration or other repair work, contact GPI Customer Service toll-free at 1-800-835-0113. In Kansas, call 316-686-7361.

Repair should be performed by authorized service personnel only or the warranty will be void.

Freight to GPI must be prepaid. Send the complete meter, clean and without any fittings.



5252 East 36th Street North  
Wichita, KS USA 67220-3205  
TEL: 316-686-7361  
FAX: 316-686-6746

**GREAT PLAINS INDUSTRIES, INC.**

"A Great Plains Ventures Subsidiary"  
1-800-835-0113 www.gpi.net

GPI is a registered trademark of Great Plains Industries, Inc.  
U.S. Patents 5,046,370; 4,856,348.